


TicSource-288G

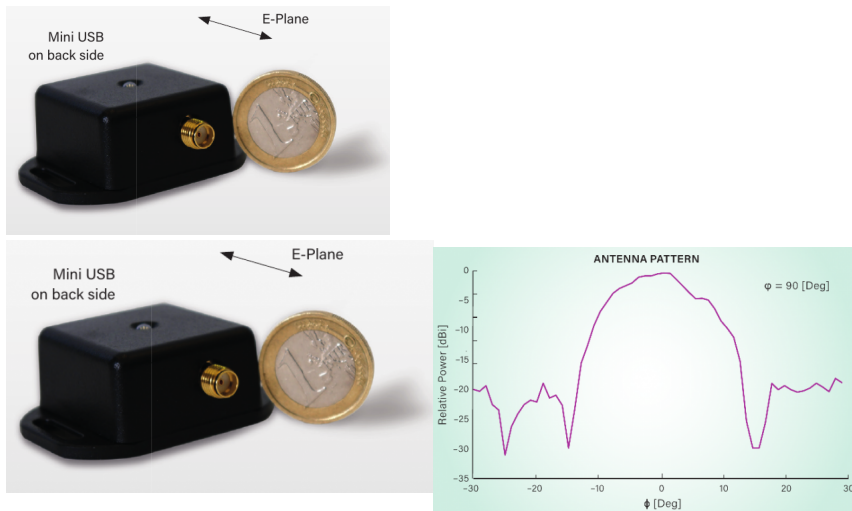

288 GHz source with up to 0.3 mW radiated power. Single lens optic with 21 dBi silicon lens. USB power supply and modulation input connector (SMA).

Rating: Not Rated Yet

[Request a quote about this product](#)

Description

The TicSource-288G is designed to meet the requirements of sophisticated imaging setups. Being powered through USB, it offers up to 0.3 mW radiated power at 288 GHz and a TTL input for source chopping up to 100 kHz. The compact housing enables easy integration of the source into imaging setups and retains a small footprint.

Bandwidth

Fixed CW at 288 GHz

Optics

Other optics on request available
21 dBi silicon lens

Interfaces

USB powered
SMA connector for chopping with up to 100 kHz (TTL signal)

Output power

Up to 0.3 mW radiated power

Modulation

Chopping with up to 100 kHz with TTL signal (SMA connector)

Product Dimensions

Dimension (L x W x H)
Weight

3 cm x 3 cm x 2 cm
80 Gram

Specifications are subject to change without prior notice.

Reviews

There are yet no reviews for this product.

// //